



**MT65 Beluga IV**  
mobile computers

## Features

### Megapixel barcode scanner.

Armed with Newland's 2D megapixel barcode reader, the MT65 Beluga IV has an excellent scanning performance. The higher resolution means even small barcodes can be read from a longer distance. Pinpoint precision scanning codes, even when close together, is made easier Acuscan.

### Android 8.1 operating system.

The Android OS of the MT65 Beluga IV ensures near endless application possibilities. It gives you the data security and admin tools you need for control and complete peace-of-mind.

### Versatile touch screen with keyboard.

The MT65 Beluga IV combines a good size touch screen with a physical keyboard. It equips you with a mobile computer suitable for many different applications, including usage with gloves or the quick and easy typing in of quantities.

### Extended battery life.

The MT65 Beluga IV provides up to 10 hours of battery life, so it is sure to last a full shift for average applications. Is your application more intensive? A replaceable battery and charging cradle with extra battery slot ensure employees can easily switch it out and continue scanning.

### Angled scan engine for comfort.

The megapixel scan engine on the MT65 Beluga IV is set at an angle. This means that the screen and keypad remain visible to the operator, even when scanning codes above shoulder height.


### GMS (optional).

The MT65 Beluga IV has models with and without Google Mobile Services (GMS). GMS offers integrated Google applications such as Gmail, Google Maps and Google Play Store.

### Accessories.

Various accessories for the MT65 Beluga IV are included in the package, amongst which: single slot charging and communication (USB) cradle, battery power supply and cable. Available add ons include: pistol grip, multi charger and holster.

## Application Scenarios

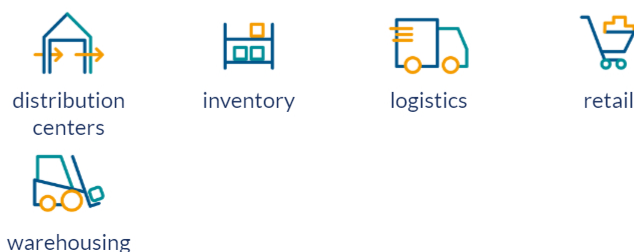

# MT65 Beluga IV technical specifications

Performance	Operating System	Android 8.1, non GMS and GMS versions available
	Processor	1.5GHz quad-core 64-bit ARM processor
	Memory RAM	2GB
	Memory Flash	16GB
	Memory Storage Expansion (Max.)	Micro SD card (max. 32GB)
	Image Sensor	1280 x 960 CMOS
	Illumination	White LED (625±10nm)
	Aiming	Laser diode
	Depth of Field EAN13 (13mil)	45-380mm
	Depth of Field CODE 39 (5mil)	75-180mm
	Depth of Field PDF417 (6.67mil)	70-170mm
	Depth of Field Data Matrix (10mil)	50-180mm
	Depth of Field QR (15mil)	40-220mm
	Minimal Print Contrast	25%
	Scan Angle Roll	360°
	Field of View Horizontal	49.5°
	Field of View Vertical	37°
Data capture	Scan Modes	Trigger Mode, Sense Mode
	Scan Rate	60 frames per second
Data capture	1D	All major 1D symbologies
	2D	QR Code, Data Matrix, Aztec, Micro PDF, Micro QR, PDF417, etc.
Physical	Dimensions (mm)	166(L)x73(W)x26(H) mm
	Weight	330g (including battery)
	Display	4" WVGA (800x480)
	Touch panel	Capacitive touch screen
	Keypad	30 keys (side keys included) with backlight
	Interfaces	Micro USB 2.0, battery charging over USB supported
	Battery Type	3.7V, 3800mAh, removable
	Expected Battery Life	10 hours
	Expected Charge Time	4.5-5 hours (charge via AC adapter)
	Notifications	Vibration, speaker and multi-color LEDs
	Power Supply Input	AC110 ~ 220V, 50~60Hz
	Power Supply Output	DC5V, 2.0A
	Expansion Slot	Micro SD card (max. 32GB)
	Camera	8 megapixels, auto focus, with LED flashlight
Environmental	Operating Temperature	-20°C to 50°C (-4°F to 122°F)
	Storage Temperature	-30°C to 70°C (-22°F to 158°F)
	Humidity	5% to 95% (non-condensing)
	Electro Static Discharge (ESD)	±15 kV (air discharge), ±8 kV (direct discharge)
	Drop	1.2m
	Sealing	IP65
Wireless	WWAN Radio	4G: TD-LTE (B38, B39, B40, B41) FDD-LTE (B1, B2, B3, B5, B7, B8, B20, B28 a&b); 3G: WCDMA (B1, B2, B5, B8) TD-SCDMA (B34, B39) CDMA2000 1X/ EV-DO Rev. A (BC0); 2G: GSM (B2, B3, B5, B8)
	WLAN Radio	IEEE 802.11 a/b/g/n, 2.4GHz and 5GHz
	WPAN Radio	Bluetooth 4.2 LE, backward compatible
	RFID	13.65MHz RFID ISO14443A/B, MIFARE, FeliCa, NFC Forum Tags, ISO15693
	GPS	GPS, AGPS
Accessories	Optional	Charging Cradle, Battery, AC adapter, USB Cable, Hand Strap, Pistol Grip, 4-slot Charger
Device Management	Software	Ndevor (MDM, Device Configuration), SOTI (MDM), Airwatch (MDM), StayLinked (TE)
Certifications	Certifications	FCCID, RoHS, IEC62471, EN60950
Waranty	Warranty	2 years